


4smarts

POWER BANK POCKET DUAL CORD 22.5W

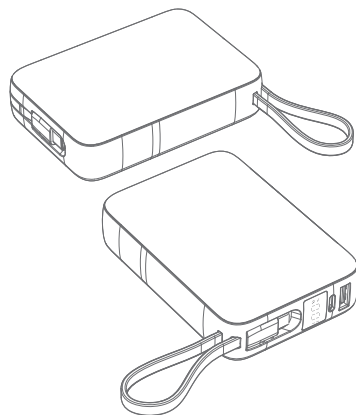

THANK YOU ♥

for choosing a quality product from 4smarts

EN

01 Safety Instructions

1.1 General precautions

- Do not drop the product or subject it to heavy shocks.
- Have the product repaired by a qualified technician only.

1.2 Precautions for electrical products

- Protect the device from dirt, moisture, overheating, extreme temperatures.
- Do not use the device and do not continue to operate it if damaged.
- Never use force when plugging in the device or when using adapters.
- Do not operate the device outside its performance limits specified in the technical data.

1.3 Precautions for batteries

Recharge the battery regularly (at least quarterly) during longer storage. Never open, damage, swallow or allow batteries or accumulators to escape into the environment, as they contain toxic and environmentally harmful heavy metals. In case of a leaking battery, the liquid must not meet your skin or eyes. In case of contact, rinse with plenty of water and consult a doctor.

02 Technical Specifications

Battery: Li-Polymer

Capacity: 20000mAh/3.85V/77Wh

IN USB-C1/C2: DC 5V/3A, 9V/2A, 12V/1.5A (18W max.)

OUT USB-C1/C2: DC 5V/3A, 9V/2.22A, 10V/2.25A, 12V/1.67A (22.5W max.)


OUT USB-C3: DC 5V/2.1A (10.5W max.)

OUT USB-A: DC 4.5V/5A, 5V/3A, 9V/2A, 10V/2.25A, 12V/1.5A (22.5W max.)

OUT USB-C1/C2/C3: share 15W max.

Supported protocols: PD3.0, QC3.0, AFC, FCP, SCP

03 Function

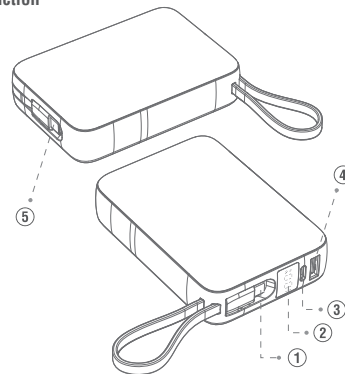

1. Output USB-C3

Built-in USB-C cable with up to 10.5W output, ideal for smaller devices such as TWS headphones, smartwatches, or other low-power gadgets.

2. LED Display

Shows remaining battery percentage and charging status.

3. Input/Output Port USB-C1 Port

Additional USB-C port for either charging the power bank (18W input) or charging external devices (22.5W output).

4. Output USB-A

Standard USB-A port with up to 22.5W output, suitable for charging smartphones, tablets, or other USB-A devices.

5. Input/Output USB-C2

Built-in USB-C cable with up to 18W input for recharging the power bank, and up to 22.5W output for charging smartphones, tablets, or other mid-sized devices.

EN

04 Maintenance and Care

Only use a soft, dry cloth to clean the device.

05 Warranty

The 4smarts GmbH assumes no liability and provides no warranty for damage resulting from improper use of the product or from failure to observe the operating instructions and/or safety notes.

06 Disposal Notification



Electric and electronic devices as well as batteries must not be disposed of with household waste. Consumers are obliged by law to return electric and electronic devices as well as batteries at the end of their service lives to public collecting points set up for this purpose or point of sale.

07 Service and Support

If the product is defective or in case of problems during installation, please consult your dealer or the 4smarts product consulting via:

<https://www.4smarts.com/contact>

Service Hotline

Monday - Friday: 9 - 17h

+ 49 (0)821 20708444

E-Mail: customer-service@4smarts.com

08 Declaration of Conformity

Hereby, 4smarts GmbH declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. The declaration of conformity may be consulted at www.4smarts.com.

EN

01 Sicherheitshinweise

1.1 Generelle Vorsichtsmaßnahmen

- Lass das Produkt nicht fallen und setze es keinen heftigen Erschütterungen aus.
- Lass das Gerät nur von Fachleuten reparieren.

1.2 Vorsichtsmaßnahmen für elektronische Produkte

- Schütze das Gerät vor Schmutz, Feuchtigkeit, Überhitzung, extremen Temperaturen.
- Öffne das Gerät nicht und betreibe es bei Beschädigungen nicht weiter.
- Wende beim Einstecken des Gerätes und bei evtl. eingesetzten Adaptern niemals Gewalt an.
- Betreibe das Gerät nicht außerhalb seiner in den technischen Daten angegebenen Leistungsgrenzen.

1.3 Vorsichtsmaßnahmen für Batterien

Lade den Akku bei längerer Lagerung regelmäßig (mind. Vierteljährlich) nach. Akkus und Batterien nie öffnen, beschädigen, verschlucken oder in die Umwelt gelangen lassen, da sie giftige und umweltschädliche Schwermetalle enthalten. Im Falle eines undichten Akkus darf die Flüssigkeit nicht mit der Haut oder den Augen in Berührung kommen. Spüle im Falle eines Kontakts mit reichlich Wasser aus und konsultiere einen Arzt.

02 Technische Daten

Batterie: Li-Polymer

Kapazität: 20000mAh / 3,85V / 77Wh

Eingang USB-C1/C2: DC 5V/3A, 9V/2A, 12V/1,5A (18 W max.)

Ausgang USB-C1/C2: DC 5V/3A, 9V/2,22A, 10V/2,25A, 12V/1,67A (22,5W max.)


Ausgang USB-C3: DC 5V/2,1A (10,5W max.)

Ausgang USB-A: DC 4,5V/5A, 5V/3A, 9V/2A, 10V/2,25A, 12V/1,5A (22,5W max.)

Ausgang USB-C1/C2/C3 kombiniert: max. 15W (geteilt)

Unterstützte Protokolle: PD 3.0, QC 3.0, AFC, FCP, SCP

03 Hinweise zur Funktion

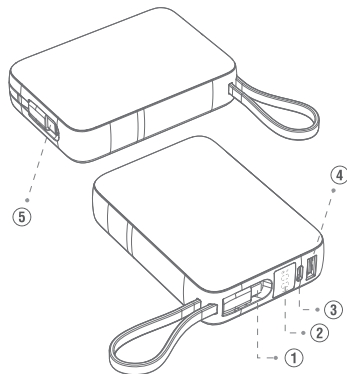

1. Ausgang USB-C3

Eingebautes USB-C-Kabel mit bis zu 10,5W Ausgangsleistung, ideal für Kleingeräte wie TWS-Kopfhörer, Smartwatches oder andere Geräte mit geringem Energiebedarf.

2. LED-Display

Zeigt den verbleibenden Akkustand in Prozent sowie den Ladezustand an.

3. Ein-/Ausgang USB-C1 Port

Zusätzlicher USB-C-Port zum Laden der Powerbank (18W Eingang) oder zum Laden externer Geräte (22,5W Ausgang).

4. Ausgang USB-A

Standard-USB-A-Anschluss mit bis zu 22,5W Ausgangsleistung, geeignet zum Laden von Smartphones, Tablets oder anderen USB-A-Geräten.

5. Ein-/Ausgang USB-C2

Eingebautes USB-C-Kabel mit bis zu 18W Eingang zum schnellen Aufladen der Powerbank und bis zu 22,5W Ausgang zum Laden von Smartphones, Tablets oder anderen mittelgroßen Geräten.

04 Wartung und Pflege

Verwende zur Reinigung nur trockene, weiche Tücher.

05 Gewährleistung

Die 4smarts GmbH übernimmt keinerlei Haftung oder Gewährleistung für Schäden, die aus unsachgemäßer Installation, Montage und unsachgemäßem Gebrauch des Produktes oder einer Nichtbeachtung der Bedienungsanleitung und/oder der Sicherheitshinweise resultieren.

06 Hinweise zum Umweltschutz



Elektrische und elektronische Geräte sowie Batterien dürfen nicht mit dem Hausmüll entsorgt werden. Der Verbraucher ist gesetzlich verpflichtet, elektrische und elektronische Geräte sowie Batterien am Ende ihrer Lebensdauer an den dafür eingerichteten, öffentlichen Sammelstellen oder an die Verkaufsstelle zurückzugeben.

07 Service und Support

Bei defekten Produkten oder Problemen während der Installation wende dich bitte an deinen Händler oder an die 4smarts Produktberatung auf:

<http://www.4smarts.com/contact>

Service Hotline

Montag - Freitag: 9 - 17 Uhr

+ 49 (0)821 20708444

E-Mail: customer-service@4smarts.com

08 Konformitätshinweis

Hiermit erklärt die 4smarts GmbH, dass sich dieses Produkt in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 2014/53/EU befindet. Die Konformitätserklärung nach der RED Richtlinie findest du unter www.4smarts.com.

4smarts

Thanks for buying our product! We at 4smarts are sure it will serve you well. Follow us on social media for news, customer support and to win great prizes. See you there!



@4smarts_official



facebook.com/4smarts



linkedin.com/company/4smarts



All listed brands are trademarks of the corresponding companies. Errors and omissions excepted, and subject to technical changes. Our general terms of delivery and payment are applied.