

Omada Gateway | Datasheet

DR3650v


Omada AX3000 Gigabit Desktop DSL Gateway



Highlights

- 5 GHz: 2402Mbps; 2.4 GHz: 574Mbps*
- VDSL2 35b: Supports 350Mbps DSL Access†
- VDSL2/ADSL2+/ADSL2/ADSL Compatibility
- 3 × RJ11 Ports (2 × FXS, 1 × DSL) & 5 × RJ45 Gigabit Ports & 2 × USB 3.0 Ports
- DPI Security Support
- IPSec/PPTP/L2TP/OpenVPN/WireGuard/GRE/SSL VPN
- Centralized Management
- Multi-WAN Load Balancing
- Omada Mesh Technology
- Desktop/Wall/Rack Mounting (Purchase Rackmount Kit-D226 Separately)

Omada Solution

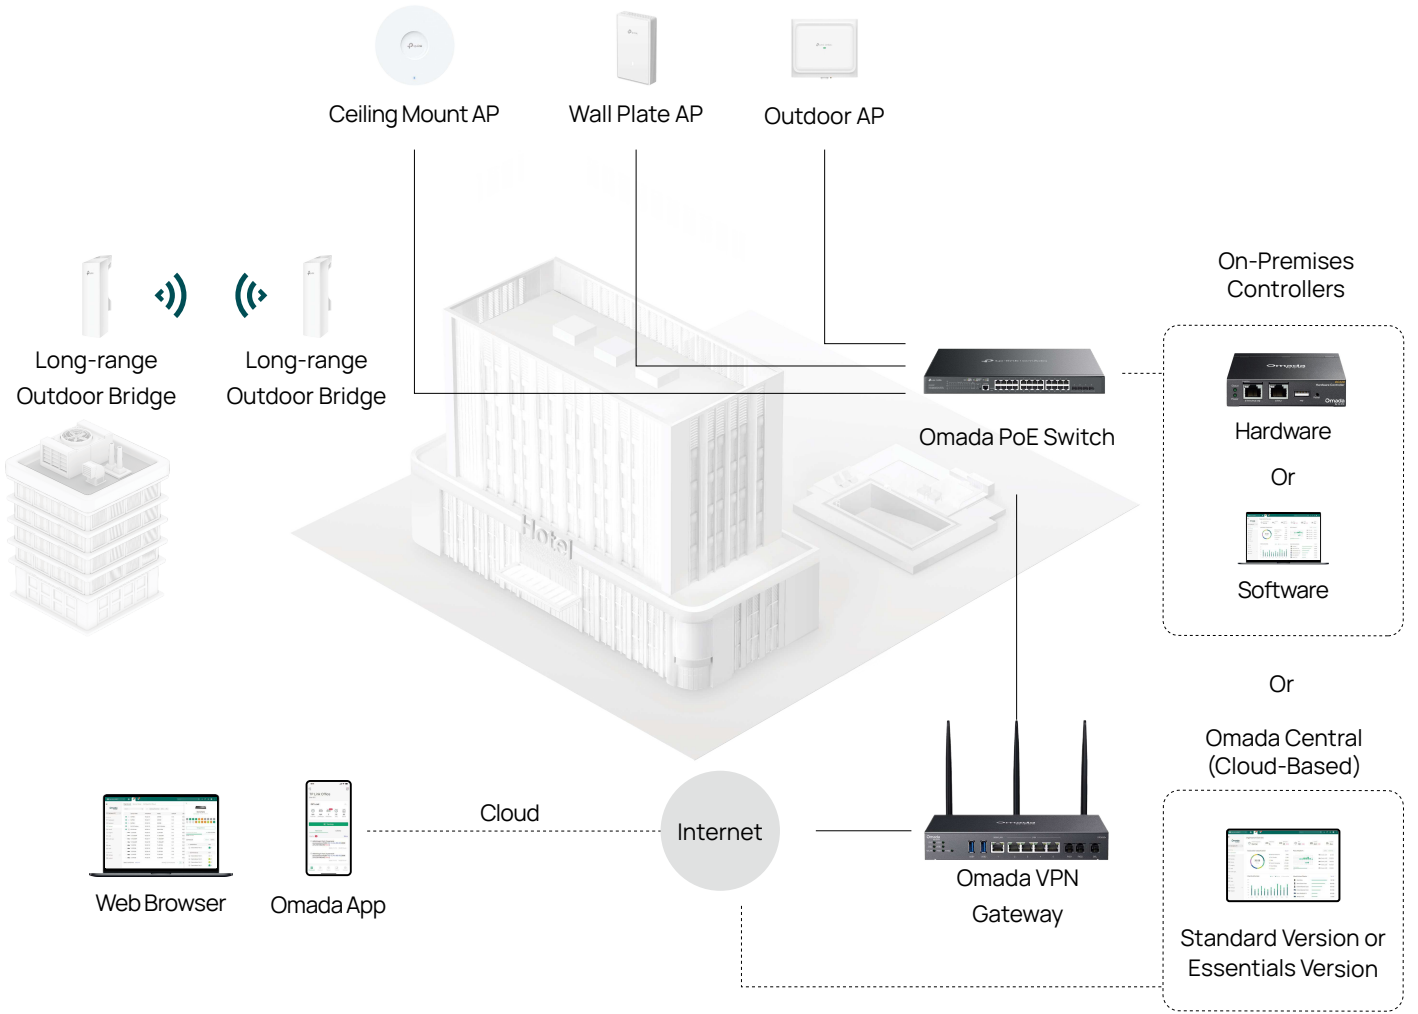

Specifications

Model		DR3650v
Hardware	Standards and Protocols	IEEE 802.3, IEEE802.3u, IEEE802.3ab, IEEE 802.3x, IEEE 802.1q, TCP/IP, DHCP, ICMP, NAT, PPPoE, NTP, HTTP, HTTPS, DNS, IPSec, PPTP, L2TP, OpenVPN, WireGuard VPN, GRE VPN, SNMP, LLDP, 802.11a/b/g/n/ac/ax
	Interface	1 Gigabit WAN/LAN Port 4 Gigabit LAN Port 1 DSL Port 2 FXS Port
	USB	2*USB 3.0 (supports USB LTE dongle and USB Storage ¹)
	DSL Standards	VDSL2: ITU G.993.2, ITU-T G.997.1 VDSL2 Profile, 8a, 8b, 8c, 8d, 12a, 12b, 17a, 35b ADSL2+:ITU-T G.992.5 ADSL2:ITU-T G.992.3 ADSL: ITU-T G.992.1(G.dmt), ITU-T G.992.2 (G.lite)
	DSL Speed	Up to 350Mbps
	Compatibility	VDSL2/ADSL2+/ADSL2/ADSL
	Wi-Fi Speed	2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps HE160
	Antennas	2.4 GHz: 2x 3 dBi dual-band detachable antennas 5 GHz: 3x 4.5 dBi dual-band detachable antennas
	Network Media	10BASE-T: UTP category 3, 4, 5 cable (Max 100 m) EIA/TIA-568 100Ω STP (Max 100 m) 100BASE-TX: UTP category 5, 5e cable (Max 100 m) EIA/TIA-568 100Ω STP (Max 100 m) 1000BASE-T: UTP category 5, 5e, 6 cable (Max 100 m)
	Button	Reset button
	Power Supply	12VDC / 3.3A Power Adapter
	Flash	256MB NAND
	DRAM	512 MB DDR4
	LED	SYS,DSL,WLAN,USB1,USB2,FXS1,FXS2, WAN/LAN (1000M Link/Act, 100/10M Link/Act),LAN (1000M Link/Act, 100/10M Link/Act)
	Max Power Consumption	Power adapter not included: 30.608W (Full load + USB 10W) Power adapter included: 35.21W (Full load + USB 10W)
	Surge Protection	DSL Port: 6 kV surge protection Others Ports: 4 kV surge protection
	Mounting	Desktop/Wall/Rack Mounting (Purchase Rackmount Kit-D226 Separately)
	Dimensions (W x D x H)	8.9 × 5.2 × 1.4 in (226 × 131 × 35 mm) (Antenna dimensions not included)
	Net Weight	1.07 Kg
	MTBF	671034.0821@25°C 480800.4477@40°C

1. For compatibility list, visit <https://www.omadanetworks.com/omada-router/compatibility/>.

Model		DR3650v
SDN Support	Hardware Controller	Automatic Device Discovery Intelligent Network Monitoring Abnormal Event Warnings
	Software Controller	Unified Configuration Reboot Schedule
	Omada App	Captive Portal Configuration ZTP (Zero-Touch Provisioning) ¹
Performance ²	Concurrent Session	150,000
	New Sessions /Second	3,800
	DPI Throughput	TCP: 881 Mbps; UDP: 813 Mbps
	Static IP NAT Throughput (Upload / Download)	937.2 Mbps/936.1 Mbps
	DHCP NAT Throughput (Upload / Download)	945.8 Mbps /940.6 Mbps
	PPPoE NAT Throughput (Upload / Download)	942.9 Mbps/942.9 Mbps
	L2TP NAT Throughput (Upload / Download)	837.4 Mbps /881.5 Mbps
	PPTP NAT Throughput (Upload / Download)	803.0 Mbps/910.5 Mbps
	66 Byte Packet forwarding rate (Upload / Download)	1,453,489 pps / 1,453,488 pps
	1,518 Byte Packet forwarding rate (Upload / Download)	81274 pps/ 91275 pps
	IPSec VPN Throughput	ESP-SHA1-AES256: 569.9 Mbps ESP-SHA256-AES256: 543.3 Mbps ESP-SHA384-AES256: 549.0 Mbps ESP-SHA512-AES256: 539.3 Mbps
	GRE	Unencrypted: 967 Mbp; Encrypted: 616 Mbps
	WireGuard VPN	311.6 Mbps
	SSL VPN	126.7 Mbps
	OpenVPN	129.3 Mbps
	L2TP VPN Throughput	Unencrypted: 909.4 Mbps; Encrypted: 494.9 Mbps
PPTP VPN Throughput	Unencrypted: 897.5 Mbps; Encrypted: 190.8 Mbps	
Basic Functions	WAN Connection Type	Static IP Dynamic IP PPPoE (supports MRU Configuration) PPTP L2TP
	DHCP	DHCP Server DHCPv6 PD Server (only in Standalone Mode) DHCP Options Customization DHCP Address Reservation Multi-IP Interfaces Multi-Net DHCP WAN DHCP 60

1. Zero-Touch Provisioning is supported only when using Omada Cloud-Based Controller.

2. Rated specifications are based on test results using the specific software version. Device performance may vary as a result of the actual scenario.

Model		DR3650v
Basic Functions	MAC Clone	Modify WAN Address
	IPTV	IGMP v2/v3 Proxy, Custom Mode, Bridge Mode
	IPv6	StaticIP / SLAAC / DHCPv6 / PPPoE / 6to4Tunnel / PassThrough / Non-Address mode
	Stateful ACL	√
	mDNS Repeater	√
	Quality of Service	√
	Bridge VLAN	√
	VLAN	802.1Q VLAN
	LAN DNS	√
VoIP	Protocols	RTP/RTCP, SIP
	SIP Registrars	12
	Telephone Functions	Telephony Book, DND & Call Blocking, Call Waiting, Call Forwarding, Call hold, Call return, Emergency Number, Call log, Voice mail
	Telephone Operation Codes	√
	Voice Codec	G.711 A/u law, G.726, G.729 A/B, G.722
Wireless Functions	Wireless Encryption	WPA/WPA2/WPA3 Personal, WPA/WPA2/WPA3 Enterprise
	Multiple SSIDs	16 in total (8 per radio)
	Enable/Disable Wireless Radio	√
	Enable/Disable SSID Broadcast	√
	Guest Network	√
	Automatic Channel Selection Algorithm	√
	Transmit Power Control	Adjust transmit Power on dBm
	Seamless Roaming	√
	Mesh	√ (with EAP that supports Mesh)
	OFDMA	√
	Beamforming	√
	MU-MIMO	√
	Rate Limit	Based on SSID/Client
	Load Balance	√
	Airtime Fairness	√
	Band Steering	√
	RADIUS Accounting	√
	MAC Authentication	√
Reboot Schedule	√	
Wireless Schedule	√	

Model		DR3650v
Wireless Functions	Support Data Rates	802.11ax: 8 Mbps to 2402 Mbps (MCS0-MCS11, NSS = 1 to 2 HE20/40/80/160) 802.11ac: 6.5 Mbps to 2166.7 Mbps (MCS0-MCS11, NSS = 1 to 2 VHT20/40/80/160) 802.11n: 6.5 Mbps to 300 Mbps (MCS0-MCS15, HT20/40) 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
Transmission	Load Balance	Intelligent Load Balance Application Optimized Routing Link Backup (Timing, Failover) Online Detection
	NAT	One-to-One NAT Multi-Net NAT Virtual Server Port Triggering ¹ NAT-DMZ FTP/H.323/SIP/IPSec/PPTP ALG UPnP Disable NAT
	Routing	Static Routing Policy Routing RIP ² OSPF ²
	Session Limit	IP-based Session Limit
	Bandwidth Control	IP-based Bandwidth Control
VPN	IPSec VPN	100 IPSec VPN Tunnels LAN-to-LAN, Client-to-LAN Main, Aggressive Negotiation Mode DES, 3DES, AES128, AES192, AES256 Encryption Algorithm IPsec Failover IKE v1/v2 MD5, SHA1, SHA2-384 and SHA2-512 Authentication Algorithm NAT Traversal (NAT-T) Dead Peer Detection (DPD) Perfect Forward Secrecy (PFS)
	PPTP VPN	PPTP VPN Server PPTP VPN Client (10) ³ 50 Tunnels PPTP with MPPE Encryption
	L2TP VPN	L2TP VPN Server L2TP VPN Client (10) ³ 50 Tunnels L2TP over IPSec
	OpenVPN	OpenVPN Server OpenVPN Client (5) ³ 55 OpenVPN Tunnels "Certificate + Account" Mode Full Mode

1. Port Triggering is supported only in Standalone Mode.

2. RIP and OSPF are supported only in Standalone Mode.

3. For PPTP VPN and L2TP VPN, DR3650v can connect with up to 10 VPN servers. For OpenVPN, DR3650v can connect with up to 5 VPN servers.

Model		DR3650v
	GRE	√ (Only in Standalone Mode)
	SD-WAN	√ (Only in Controller Mode)
	WireGuard VPN	√
	SSL VPN	50 Tunnels
Security	Attack Defense	TCP/UDP/ICMP Flood Defense Block TCP Scan (Stealth FIN/Xmas/Null) Block Ping from WAN
	Filtering	Web Group Filtering ¹ URL Categories and URLs Filtering Web Security ¹
	DNS Proxy	DNSSEC, DoH, DoT, DNS Override
	ARP Inspection	Sending GARP Packets ARP Scanning ² IP-MAC Binding ARP Detection
	Access Control	Source/Destination IP Based ACL Stateful ACL IPv4/IPv6 ACL National Based ACL FQDN
	DPI	Deep Packet Inspection Support 2421 type Applications
Authentication	Web Authentication	No Authentication Simple Password ³ Hotspot (Local User / Voucher ³ / SMS ³ / Radius ³) External Radius Server External Portal Server ³ LDAP ⁴
Management	Service	Dynamic DNS (Dyndns, No-IP, Peanuthull, Comexe, DDNS Customization)
	Maintenance	Web Management Interface Remote Management Export & Import Configuration SNMP v1/v2c/v3 Diagnostics (Ping & Traceroute) NTP Synchronize ⁴ Port Mirroring CLI (only in Standalone Mode) Syslog Support TR-069 (data models of TR-098 and TR-181 are supported)

1. Web Group Filtering and Web Security are supported only in Standalone Mode.
2. ARP Scanning is supported only in Standalone Mode.
3. The following web authentication methods are supported only in Controller Mode: Simple Password, Voucher, SMS, Radius, and External Portal Server.
4. LDAP and NTP Synchronize are supported only in Standalone Mode.

Model		DR3650v
Others	Certification	CE, RoHS
	Package Contents	DR3650v, Power Adapter, Ethernet Cable, Phone Cable, Rubber Feet, Quick Installation Guide
	System Requirements	Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7/8/8.1/10/11 MAC OS, NetWare, UNIX or Linux
	Environment	Operating Temperature: 0 °C to 40 °C (32 °F to 104 °F) Storage Temperature: -40 °C to 70 °C (-40 °F to 158 °F) Operating Humidity: 10% to 90% non-condensing Storage Humidity: 5% to 90% non-condensing

Ordering Information

Host Gateway	
Model	Description
DR3650v	Omada AX3000 Gigabit Desktop DSL Gateway

*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and coverage are not guaranteed and will vary.

†Maximum wired signal rates are the physical rates. Actual data throughput is not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors.

*Some models featured in this guide may be unavailable in your country or region. Visit the website for local sales information: www.omadanetworks.com.

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2025 TP-Link