


8 Channel PoE+ Network Video Recorder

MODEL: VIGI NVR2008H-8MP





4K HDMI Output Provides Finer Details and Crystal Clarity Quick Playback 8-Channel Synchronous Playback* 2 SATA Interfaces Up to 16 TB Capability for Each HDD**

Ptp-link

Remote Management
Dedicated VIGI app and PC Client

ONVIF Comprehensive Compatibility



VIGI Surveillance Solution

The VIGI network video recorder coordinates with camera systems to help you view, store, and play back videos.





8-Channel Live View

Display each surveilled zone in real-time on a single interface for comprehensive control.



8× PoE+ Ports for Easier Camera Deployment

Easily connect and power your PoE camera with one RJ45 cable transmitting both data and power.



4K HDMI Output

Show more details with up to 8MP resolution for one channel and 32MP decoding capacity in total for all channels.



Free Remote Management

Take full control over your security anytime and anywhere on the VIGI app or PC client.



Practical Playback


Find the target footage easily by date, event types, and tags. Replay with variable playback speeds to quickly review footage.



Non-Stop Recording

Stores up to 32 TB of footage from connected cameras to secure your data for quick and convenient access.**

Network Topology

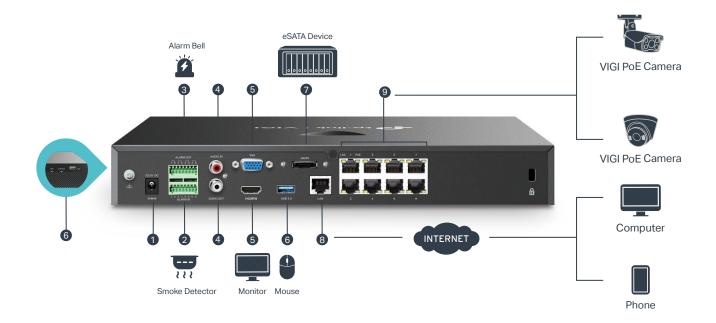

- 1. Power Supply
- 2. 6× Alarm IN Ports to Connect External Sensors
- 3. 4× Alarm OUT Ports to Connect Alarm Devices
- 4. AUDIO IN and AUDIO OUT for Two-Way Audio
- 5. HDMI and VGA for Video Independent Output
- 6. 1× USB 3.0 Port (Rear) and 1× USB 2.0 Port (Front) for Mouse and Keyboard Connections
- 7. 1× eSATA Port to Connect an External Storage Device**
- 8. 1× 10/100/1000 Mbps LAN Port for Ethernet Connection
- 9.8× PoE+ Ports to Connect and Power Your Cameras



HIGH DEFINITION MULTIMEDIA INTERFAICE

The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

[†]HDD is not included.

[‡]Some features may operate sub-optimally due to compatibility issues. For best performance, we recommend using VIGI NVR with VIGI cameras.

"A hard disk drive (not included) must be installed for operation. ©2024 TP-Link

Specifications

NVR	
Product Model	VIGI NVR2008H-8MP
Video and Audio	
IP Video Input	8-Channel
Incoming Bandwidth	160 Mbps
Outgoing Bandwidth	160 Mbps
HDMI Output Resolution	1 Channel, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz
VGA Output Resolution	1 Channel, Resolution: 1920x1080/60Hz, 1680x1050/60Hz, 1440x900/60Hz, 1280x1024/60Hz, 1280x720/60Hz
Video Output Mode	HDMI/VGA Simultaneous Output
Multi-View Display	1/4/6/8/9
Decoding	
Audio Compression	G.711A/G.711U/G.726
Video Compression	H.265+/H.265/ H.264+/H.264
Record Resolution	8MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous Playback	8-Channel [†]
Capability	• 30fps: 4-ch @ 8MP, 6-ch @ 5MP, 8-ch @ 4MP
Record Management	
Record Mode	Manual Recording, Scheduling Recording, Motion Detection Recording
Playback Mode	Instant Playback, Rgular Playback, Tag Playback, Event Playback
Backup Mode	Regular Backup, Video Clip Backup
Playback Function	Play, Pause, Stop, Fast Forward, Fast Backward, Play By Frame, Full Screen, Video Clip, Export Clip, Digital Zoom, Lock Recording, Audio On/ Off
Network	
Network Protocols	UPnP (Plug and Play), NTP (Network Timing), SMTP, DNS, TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, RTSP, SSL/TLS, RTP, IPv4, ARP
Interoperability	ONVIF Profile S, CGI
Mobile Phone Access	Android, iOS
Browser	Chrome (57+), Firefox (52+), Edge (91+), Safari (11+)
PoE	
Interface	8, RJ-45 10/100 Mbps PoE+ Ports

PoE Budget	90 W [△] Available for All PoE+ Ports, 30 W Max per Port
Standard	802.3at/af Compliant
External Interface	
Network Interface	1, RJ-45 10/100/1000 Mbps Self-Adaptive Ethernet Interface
USB Interface	1 Front USB 2.0 Port, 1 Rear USB 3.0 Port
Audio Interface	1-ch RCA Input; 1-ch RCA Output
Alarm In/Out	6/4
Serial Interface	N/A
Power	1× DC Jack
Reset Button	1
Speaker	N/A
eSATA	1
HDMI	1
VGA	1
Hard Disk	
SATA	2 SATA Interfaces
Capacity	Up to 16 TB Capacity for Each HDD*
Alarm	
	Motion Detection
General Alarm	 Video Tampering Scene Change Detection Line-Crossing Detection Intrusion Detection Region Entering Detection Region Exiting Detection Loitering Detection Object Abandoned/Removal Detection Vehicle Detection Human Detection Abnormal Sound Detection Smart Frame Note: The alarm function requires the use of a camera.
General Alarm Anomaly Alarm	 Video Tampering Scene Change Detection Line-Crossing Detection Intrusion Detection Region Entering Detection Region Exiting Detection Loitering Detection Object Abandoned/Removal Detection Vehicle Detection Human Detection Abnormal Sound Detection Smart Frame

General	
Package Contents	 VIGI Network Video Recorder Power Adapter Power Cables HDD Power Cables HDD Data Cables Mounting Accessories Mouse Quick Installation Guide
Power Supply	53.5V DC/2.43A
Power Consumption	• 8.5 W (Without Disk) • 40 W (With Disk)
Working Temperature	 NVR: -10 °C–55 °C Power Adapter: 0 °C–40 °C
Storage Temperature	-40°C-70 °C
Working Humidity	10%~90% RH Non-Condensing
Storage Humidity	10%~90% RH Non-Condensing
Product Dimensions (W \times D \times H)	13 × 11.2 × 1.8 in (330 × 285 × 45 mm)
Net Weight	2.1 Kg [§]
Gross Weight	3.9 Kg [§]
Certification	CE, EAC, UKCA, RCM, Triman, BSMI, VCCI, FCC, IC, HDMI



[^]Calculations are based on laboratory testing. Actual data is not guaranteed and will vary as a result of client limitations and environmental factors.

*HDD is not included.

[†]The number of simultaneously playable channels may be fewer than 8, or none, if the total resolution exceeds 32MP.

[‡]This model currently supports ONVIF Profile S.

[§]Due to the weight of this model, it is recommended to use a tray when mounting the rack with angle iron. Please note that the tray is not included.