


# DOM-311-TSO

## 4G IIoT RTU




### Key Features

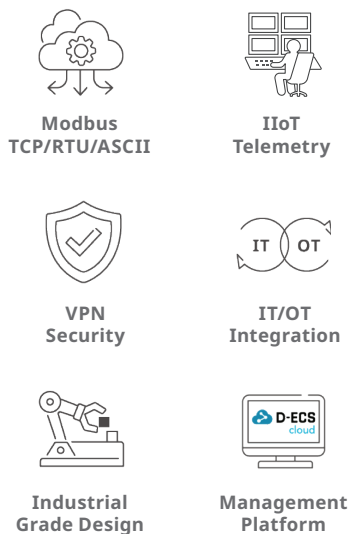

### Applications

- Environmental Monitoring (flood, air pollution, landslide, disaster detection)
- Livestock
- Fish Farming
- Wastewater Treatment Plant
- Greenhouse

### Connection Diagram

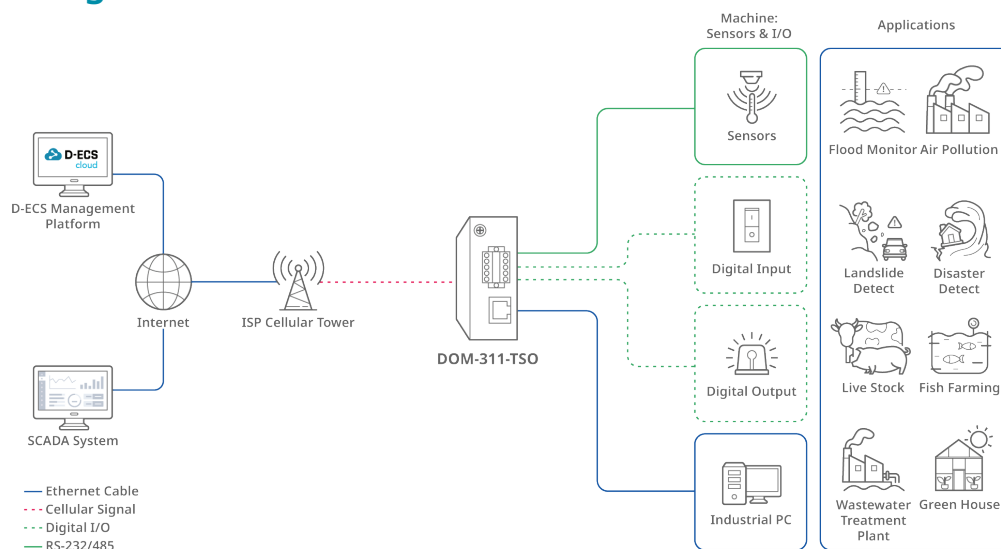

The DOM-311-TSO 4G IIoT RTU provides LTE Cat 4 speeds up to 150 Mbps for downlink. It is equipped with one Fast Ethernet port and expanded IO capabilities including one RS232/485 port, three digital inputs, and two digital outputs, making it suitable for a wide range of IT/OT applications.

### Seamless IT/OT Integration for Enhanced Efficiency

The DOM-311-TSO 4G IIoT RTU (Remote Terminal Unit) is key to converging business operations with production processes, offering advantages such as enhanced decision-making, streamlined process automation, preventive maintenance, and maximized production output. Leveraging reliable 4G connectivity, it facilitates quick integration of remote sensors, devices, and machinery, ensuring centralized manageability and boosting competitive edge.

With its multi-interface compatibility including RS-232/485 and digital I/O (DI/DO), the DOM-311-TSO promptly responds to IoT sensor criteria and enables digital output to end devices in the OT field, improving responsiveness and automation in industrial applications. It supports various industrial communication protocols and utilizes the Modbus transfer protocol between RTU and TCP, simplifying integration into complex automation and remote control systems, thus enhancing operational efficiency and system reliability.

### Data Telemetry

The DOM-311-TSO provides centralized control for data acquisition from remote devices via Modbus TCP, RTU, and ASCII protocols to streamline monitoring and analytics. With multi-interface compatibility, including RS-232/485 and digital I/O (DI/DO), the device enables real-time data transfer to the control center, providing comprehensive insights and improved operational efficiency.

### Robust Build Quality

The DOM-311-TSO is designed to maximize M2M connection reliability and availability, featuring a corrosion-resistant zinc-plated steel casing, wide voltage input range, wide operating temperature range and humidity tolerance, making it suitable for the most demanding M2M applications in virtually any environment. Convenient DIN-Rail design allows the DOM-311-TSO to be mounted virtually anywhere to optimize signal quality.

Specifications

Device Interface
<ul style="list-style-type: none"><li>Cellular: 4G LTE Cat 4</li><li>SIM Slot: 1 x SIM (Nano SIM)</li><li>Ethernet: 1 x FE LAN port</li><li>Serial Ports:<ul style="list-style-type: none"><li>1 x RS-232 or RS-485 terminal block</li><li>3 x DI (logic 0: 0-2 V, logic 1: 5-30 V)</li><li>2 x DO (open collector, max. 30 V) terminal block</li></ul></li><li>Power Input: DC 9-36 V terminal block</li><li>Antenna Connectors: 2 x SMA (F) cellular</li></ul>
Performance <sup>1</sup>
<ul style="list-style-type: none"><li>Maximum Cellular Data Throughput:<ul style="list-style-type: none"><li>LTE: 150 Mbps (DL) / 50 Mbps (UL)</li></ul></li></ul>
WAN
<ul style="list-style-type: none"><li>WAN Interface: Cellular</li><li>Cellular: NAT</li><li>Connection Monitoring: Ping query reboot</li></ul>
Network
<ul style="list-style-type: none"><li>LAN: DHCP server</li><li>Routing: Static</li><li>DDNS: DynDNS, No-IP, dynamic DO</li></ul>
Services
<ul style="list-style-type: none"><li>Event Management: SMS</li></ul>
VPN
<ul style="list-style-type: none"><li>VPN Tunnel: OpenVPN</li></ul>
Security
<ul style="list-style-type: none"><li>Firewall: IPS, port forward</li><li>Access Control: MAC/IP filter</li></ul>
Administration
<ul style="list-style-type: none"><li>Management: D-Link D-ECS<sup>2</sup></li><li>Maintenance: Web UI</li><li>System: FW upgrade, reboot and reset</li></ul>
Monitoring
<ul style="list-style-type: none"><li>Device Status: Connection information</li><li>Cellular Status: Cellular information/status, cellular signal quality</li><li>Security: VPN status</li></ul>
Field Communication
<ul style="list-style-type: none"><li>Virtual COM: TCP client, TCP server, UDP</li><li>Modbus: Modbus TCP/RTU/ASCII master/slave access</li></ul>
Operating Environment
<ul style="list-style-type: none"><li>Operating Temperature: -30 to 70°C (-22°F to 158°F)</li><li>Storage Temperature: -40 to 85°C (-40°F to 185°F)</li><li>Operating Humidity: 10% to 95% non-condensing</li><li>Storage Humidity: 0 to 95% non-condensing</li><li>Dimensions: 78 x 70 x 29 mm</li></ul>
Certifications and Approvals
<ul style="list-style-type: none"><li>Certifications: CE, UKCA</li></ul>

Package Contents (Standard)
<ul style="list-style-type: none"><li>2 x Cellular SMA Antennas</li><li>1 x RJ-45 Cable</li><li>1 x Power Adapter</li><li>1 x Terminal Block (10-pin)</li><li>1 x DIN-Rail Kit</li></ul>


Available Versions

EU SKU (HW: A1)	
4G LTE	FDD: B1/B3/B7/B8/B20/B28A
	TDD: B38/B40/B41

1 Data rates are theoretical. Data transfer rate depends on network capacity and signal strength.  
2 You only have to pay a M2M device license fee required when applying for D-ECS license.

Hardware

Front View

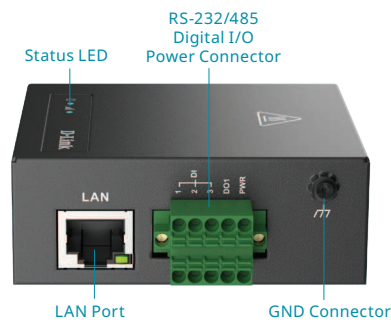

Back View

