

Product Highlights

Power More Devices

Eight Power over Ethernet (PoE+) ports allow you to power more PoE-capable cameras, access points, and VoIP phones using standard Ethernet cabling

Powerful PoE+

IEEE 802.3at PoE+ (up to 30 W per port) with high 125 W PoE budget, perfect for high-performance access points and multi-featured IP cameras

Gigabit Uplink Connections

One Gigabit Ethernet and one SFP uplink port allow for additional connections to storage and over longer distances



DGS-1010MP

10-Port Gigabit Max PoE Switch

Features

High-Speed Networking

- Eight 10/100/1000 Mbps PoE+ Ethernet access ports
- One Gigabit Ethernet and one SFP uplink port for uplink connections
- Full/half-duplex for 10/100 Mbps Ethernet and full-duplex for 1000 Mbps Ethernet

Reliability

- IEEE 802.3x Flow Control
- Store-and-forward switching scheme
- RoHS compliant

Easy Setup

- Plug and play installation
- Auto MDI/MDI-X crossover on all ports

Desktop and Rackmount Design

- Rack-mountable
- Fanless design

PoE+ Functionality

- IEEE 802.3at-compliant
- 125 W total power budget
- Up to 30 W power output per port

The D-Link DGS-1010MP 10-Port Gigabit Max PoE Switch is an ideal solution for small offices and enterprise environments looking to expand the network with a set of Power over Ethernet devices such as wireless access points, IP cameras, and IP phones. Built with small business and enterprise users in mind, the DGS-1010MP is a high-speed, flexible switch that features a fanless, quiet design so it can be conveniently placed anywhere in a working environment.

Power Over Ethernet

The DGS-1010MP features eight 10/100/1000BASE-T ports that support the IEEE 802.3at Power over Ethernet (PoE+) standard. Each of the eight PoE+ ports can supply up to 30 W, with a total combined PoE budget of 125 W, allowing users to power up to four IEEE 802.3at-compliant devices without requiring an additional power supply. This allows devices to be installed in locations without any power outlets, saving on installation costs and reducing the time it takes to install new devices.

Seamless Integration

The DGS-1010MP offers nine 10/100/1000BASE-T RJ-45 ports and one SFP port. The SFP transceivers are available with a variety of transmitter and receiver specifications, allowing users to choose the most suitable network interfaces and appropriate transceivers based on their requirements.

DGS-1010MP 10-Port Gigabit Max PoE Switch

Superior Performance

The DGS-1010MP is fully plug-and-play, meaning installation is quick and easy and requires no additional configuration. Support for Auto MDI/MDI-X on all ports eliminates the need for crossover cables when connecting to another switch. Auto-Negotiation on each port senses the link speed of a network device (either 10, 100, or 1000 Mbps) and intelligently adjusts for optimal compatibility and performance. With IEEE 802.3x flow control, the DGS-1010MP also maximises network performance while minimising packet loss during data transmission. In addition, the DGS-1010MP features one Gigabit Ethernet and one SFP uplink port for high-speed connections to remote storage or for long-distance fibre connections to an uplink network. Combining the convenience of PoE, superior performance, and ease of use, the DGS-1010MP is the ideal choice for flexibly expanding your network while remaining cost-efficient.


Compact and Silent Design

The DGS-1010MP has a compact design so that it can be deployed in any easily accessible location on the work floor, allowing you to power a set of PoE-powered devices while avoiding additional cable clutter. Alternatively, the standardised housing means the switch can also be mounted in a standard rack and be integrated in a server infrastructure. The DGS-1010MP is furthermore built around a fanless design. This makes the switch suitable to be used closer to, or in populated areas where it works efficiently while guaranteeing a quiet working environment.

Green Technology

The DGS-1010MP supports IEEE 802.3az Energy-Efficient Ethernet (EEE), reducing power consumption of the switch when network utilisation is low and minimising operating costs during periods of inactivity. By using EEE-compliant devices with the DGS-1010MP, organisations can noticeably reduce power consumption by having the switch automatically put ports into sleep mode when they are not being used.

Example Application Diagram

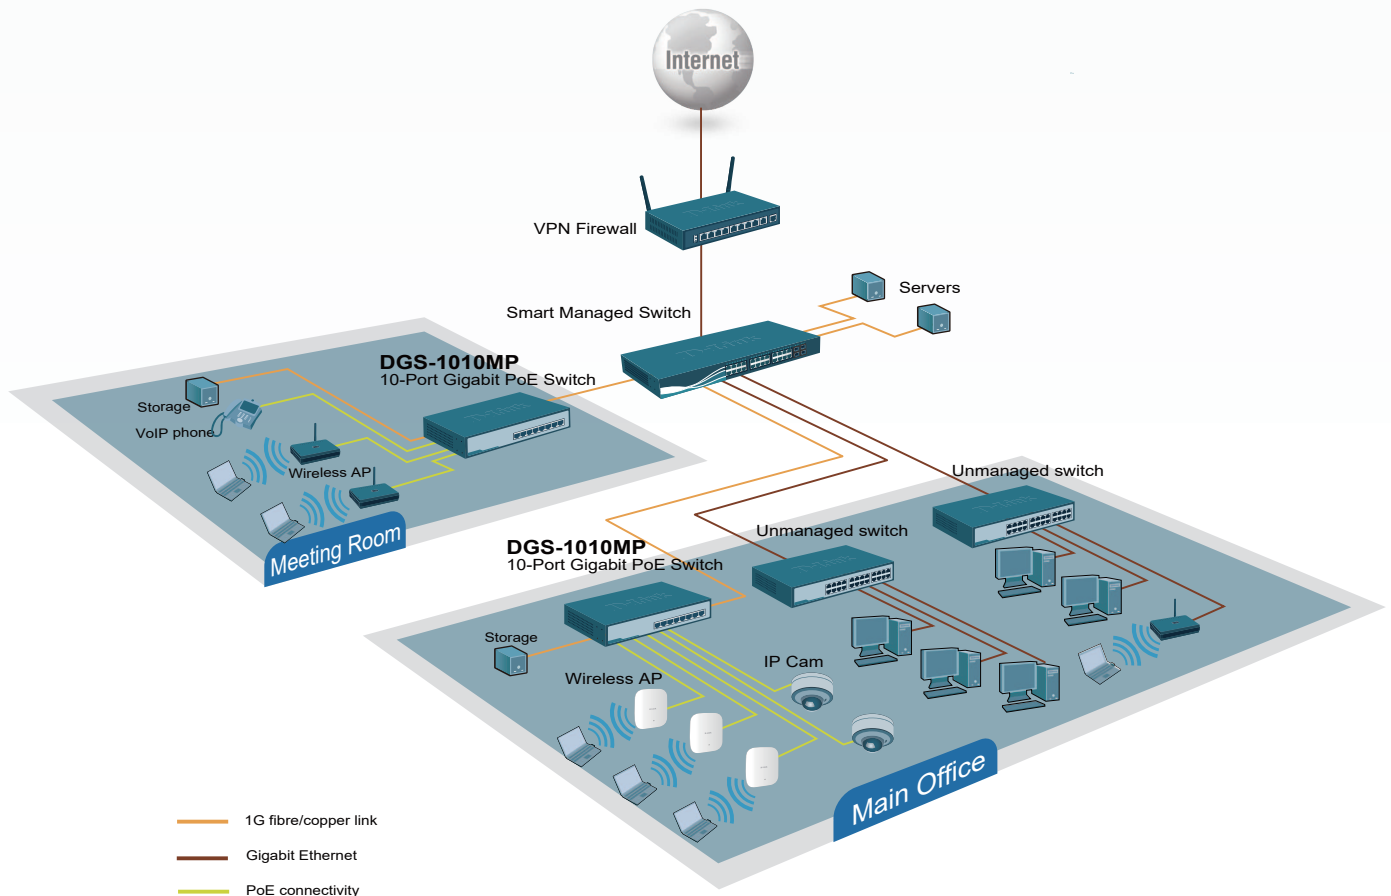

DGS-1010MP 10-Port Gigabit Max PoE Switch

Technical Specifications

General	
Size	• Desktop/rackmount size, 1U height
Number of Ports	<ul style="list-style-type: none"> • 8 x 10/100/1000 Mbps PoE+ ports • 1 x 10/100/1000 Mbps Ethernet uplink port • 1 x 100/1000 Mbps SFP uplink port
Port Standards & Functions	<ul style="list-style-type: none"> • IEEE 802.3i 10BASE-T Ethernet • IEEE 802.3u 100BASE-TX Fast Ethernet • IEEE 802.3ab 1000BASE-T Gigabit Ethernet • IEEE 802.3z Gigabit fiber • IEEE 802.3af/at Power over Ethernet • IEEE 802.3az Energy-Efficient Ethernet • IEEE 802.3x Flow Control • ANSI/IEEE 802.3 NWay auto-negotiation
Switching Capacity	• 20 Gbps
Media Interface Exchange	• Auto MDI/MDI-X
Transmission Method	• Store-and-forward
MAC Address Table	• 4K entries per device
Packet Buffer Memory	• 1.5 Mb per device
Packet Filtering / Forwarding Rates	<ul style="list-style-type: none"> • Ethernet <ul style="list-style-type: none"> • 14,880 pps per port • Fast Ethernet <ul style="list-style-type: none"> • 148,800 pps per port • Gigabit Ethernet <ul style="list-style-type: none"> • 1,488,000 pps per port
Data Transfer Rates	<ul style="list-style-type: none"> • Ethernet <ul style="list-style-type: none"> • 10 Mbps (half-duplex) • 20 Mbps (full-duplex) • Fast Ethernet <ul style="list-style-type: none"> • 100 Mbps (half-duplex) • 200 Mbps (full-duplex) • Gigabit Ethernet <ul style="list-style-type: none"> • 2000 Mbps (full-duplex)
Network Cables	<ul style="list-style-type: none"> • 10BASE-T: <ul style="list-style-type: none"> • UTP Cat 3/4/5/5e (100 m max.) • EIA/TIA-586 100-ohm STP (100 m max.) • 100BASE-TX <ul style="list-style-type: none"> • UTP Cat 5/5e (100 m max.) • EIA/TIA-568 100-ohm STP (100 m max.) • 1000BASE-T <ul style="list-style-type: none"> • UTP Cat 5/5e (100 m max.) • EIA/TIA-568 100-ohm STP (100 m max.)
PoE Ports	• Port 1 to 8
PoE Budget	<ul style="list-style-type: none"> • 125 W • Up to 30 W per port
Physical	
Dimensions	• 280 x 180 x 44 mm
Weight	• 1.75 kg
Power Input	• 100 to 240 V AC, 50/60 Hz
Power Consumption	<ul style="list-style-type: none"> • 7.87 W (PoE off) • 152.2 W (PoE on)
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 40 °C • Storage: -10 to 70 °C (14 to 158 °F)
Humidity	<ul style="list-style-type: none"> • Operating: 0% to 95% RH non-condensing • Storage: 0% to 95% RH non-condensing
EMI	<ul style="list-style-type: none"> • CE Class A • FCC Class A • VCCI Class A
Safety	<ul style="list-style-type: none"> • cUL • CB • LVD

DGS-1010MP 10-Port Gigabit Max PoE Switch

Optional SFP Transceivers	
DEM-310GT	1000BASE-LX Single-mode, 10 km
DEM-311GT	1000BASE-SX Multi-mode, 550 m
DEM-312GT2	1000BASE-SX Multi-mode, 2 km
DEM-330T/R	1000BASE-BX-D/BX-U, single-mode 10 km
DEM-331T/R	1000BASE-BX-D/BX-U, single-mode 40 km
DEM-211	100BASE-FX, multi-mode, 2 km
DGS-712	1000 BASE-T Copper SFP Transceiver



For more information: www.dlink.com

D-Link (Deutschland) GmbH, Schwalbacher Strasse 74, 65760 Eschborn, Germany
D-Link (Europe) Ltd, 3rd Floor, 166 College Road, Harrow, London, HA1 1BH, United Kingdom

Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2024 D-Link Corporation. All rights reserved. E&OE.

Updated February 2025

