

MBP20HVIEC6

QUICK MAINTENANCE WITHOUT POWER INTERRUPTION

Easy switching to utility power during UPS maintenance


Designed for Uninterruptible Power Supply (UPS), the Maintenance Bypass PDU (MBP) Series allows utility power to bypass the UPS, so that users can perform quick and safe maintenance without having to shut down power system and connected equipment. The MBPs support flexible installation to meet different space requirement.

SERIES FEATURES

- > 1U Rackmount
- LED Status Indicator
- Metal Housing
- Retaining Clip Design
- Multiple Mounting Options
- Rack Ears Included
- Cascading Design

PRODUCT CALLOUTS

- 1 . AC Outlets
- 2 . Output Circuit Breaker
- 3 . LED Status Indicators
- 4 . Maintenance Bypass Switch
- 5 . "To UPS Output" Inlet
- 6 . "To UPS Input" Outlet
- 7 . "Utility Power" Inlet

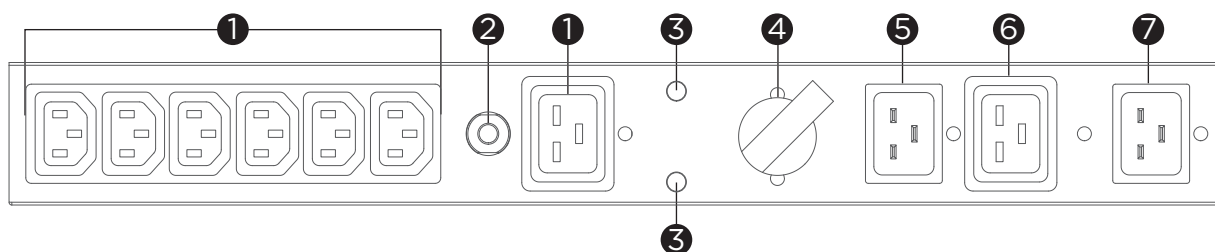

MBP20HVIEC6



TECHNICAL SPECIFICATIONS

Model Name	MBP20HVIEC6		
General			
Compatible Models	OL1000ERTXL2U, OL1500ERTXL2U, OL2000ERTXL2U, OL3000ERTXL2U, OL3KERTHDL, OLS1000ERT2UA, OLS1500ERT2UA, OLS2000ERT2UA, OLS2200ERT2UA-B, OLS3000ERT2UA, OLS3000ERT2UA-B, US10001TSARM, US10001.5TSARM, US10002TSARM, US10003TSARM, OLS1000RT2UA, OLS2000RT2UA, OLS3000RT2UA		
Input			
Input Voltage Range (Vac)	200 - 240		
Rated Input Current (A)	16		
Utility Power	IEC C20		
UPS Power Input	IEC C19		
UPS Outlet	IEC C20		
Output			
Outlet Type	IEC C19 x 1, IEC C13 x 6		
Typical Transfer Time (ms)	<4		
Cascading	Yes, IEC 16A Output Socket		
Management			
LED Indicators	Normal Status (Green Color), Bypass Status (Red Color)		
Physical			
Form Factor	>1U Rackmount		
Enclosure Construction	Metal		
Color	Black		
Installation	Multi-Position Mountings, Vertical Rackmount, Horizontal Rackmount		
Installation Attached to Rack/Tower UPSs	Yes		
Physical Size			
Dimensions (WxHxD) (mm.)	433 x 51 x 76		
Weight (kg.)	1.3		
Shipping Dimensions			
Dimensions (WxHxD) (mm.)	245 x 66 x 500		
Weight (kg.)	3.5		
Environmental			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 90		
Operating Elevation (feet/meters)	0-9,843 feet (0-3,000 meters)		
Storage Temperature (°C)	-15 - 45		
Certifications			
Certifications*	CE		
RoHS	Yes		

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.